

FGDP1000 (MTW)


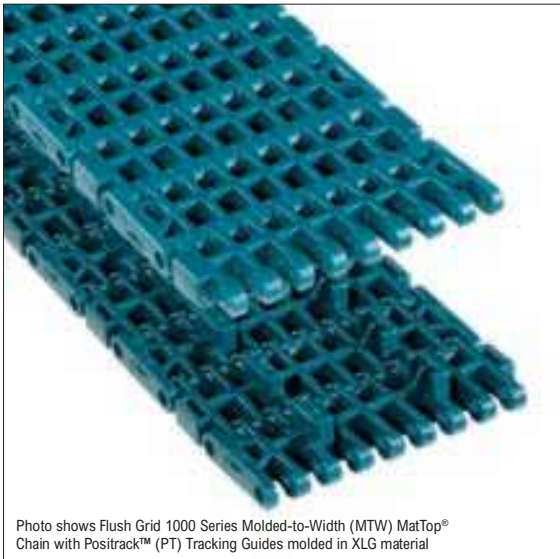


Photo shows Flush Grid 1000 Series Molded-to-Width (MTW) MatTop® Chain with Positrack™ (PT) Tracking Guides molded in XLG material

Chain Information

desc	Chain Width		Chain Edge to Tracking Guide Edge		Number of Sprockets	Chain Strength	
	in	mm	in	mm		lbs	N
84MM	3.31	84.0	0.84	21.0	1	420	1,868

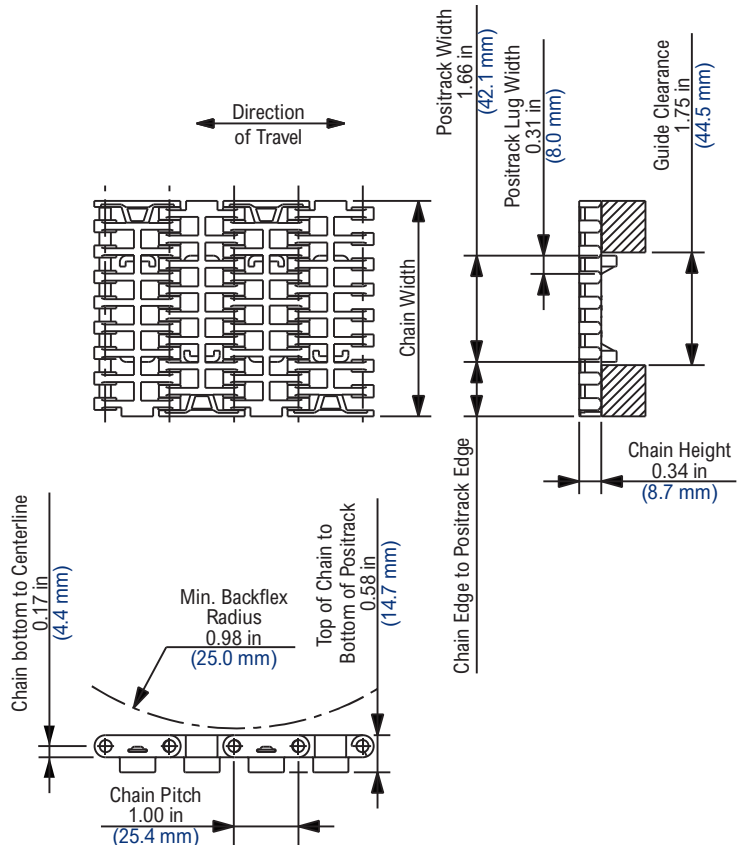

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max	wet	min	max	wet	lbs/ft ²	Kg/m ²	
Standard Materials											
XLG	Low Friction Green	Polyester	-40	180	150	-40	82	66	1.11	5.42	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MCC, and MatTop are trademarks of Rexnord Corporation. All rights reserved.

Additional Notes

Stocked in 120 pitch, 10 ft (3.048 m) length strands.
Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended.
For additional material information, see material portfolio.
FGDP1000XLG84 is Part No. 873.30.09